

NP 88™

POWERED BY UNICATION

DISTRIBUTED BY USALERT, LLC™

“a continuation of product and service excellence”

900 FLEX

The all new *NP 88* numeric pager provides the quick messaging capabilities to meet your daily business needs. Compact, lightweight and easy to use.

The *NP 88* is synthesized, fully programmable and available in 900 MHz supporting FLEX coding technology.



SYNTHESIZED

- Backlight display
- Date and Time
- Low Battery Indication
- and much more

OSI International, LLC
164 West Royal Palm Road Boca
Raton, Florida, 33432-3830
Phone: 561 394 9508

Sales: Robert O'Sullivan
Email: info@osiinternational.net
Fax: 561 394 9354
Web: www.osiinternational.com

NP 88 TM

POWERED BY UNICATION


DISTRIBUTED BY USALERT, LLC TM

NP 88 Features:

- Message time stamp and message lock
- 4 individual cap codes
- Duplicate message detection
- Message retention when off or changing the battery
- Delete individual messages or delete ALL
- Displays time and date
- Selectable vibrate, various tone alert selections or silent operation
- Reminder alert
- Graphic battery level indication

NP 88 Specifications:

Sensitivity	9 uV/m (1600 BPS) 11 uV/m (3200 BPS) 13 uV/m (6400 BPS)
FLEX	1600 Baud, 3200 Baud and 6400 Baud
Channel spacing	25 KHz
Adjacent channel	40 dB
Image rejection	50 dB
Spurious rejection	40 dB
IM	40 dB
Alert SPL	75 dB @ 30 cm
Operating temperature	-5 C to 40 C
Battery	1.5 Vdc AA
Dimensions	45mm (w) / 63.7mm (h) / 17.5mm (d)

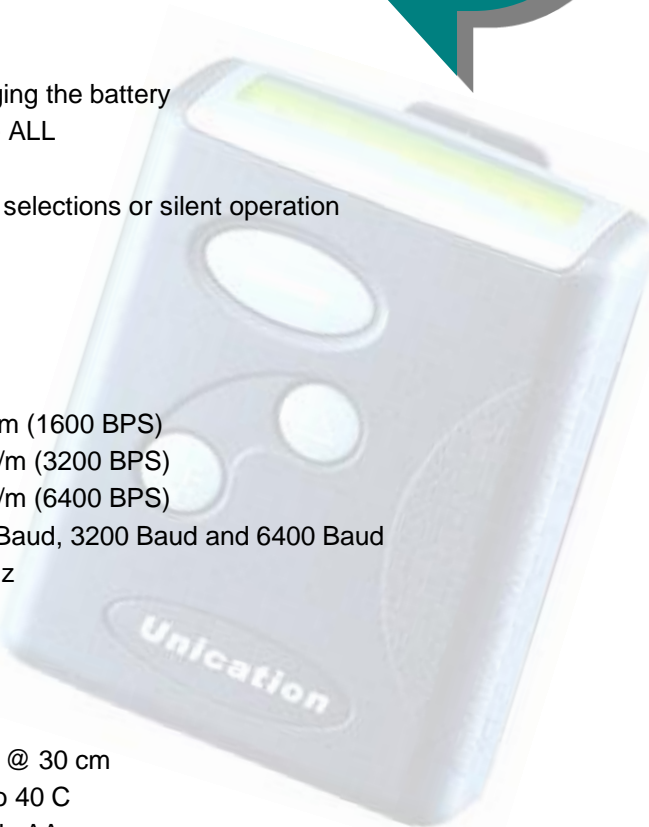

FEATURES AND SPECIFICATIONS

