


PD702 User Guide

Quick Reference

Radio Guide for

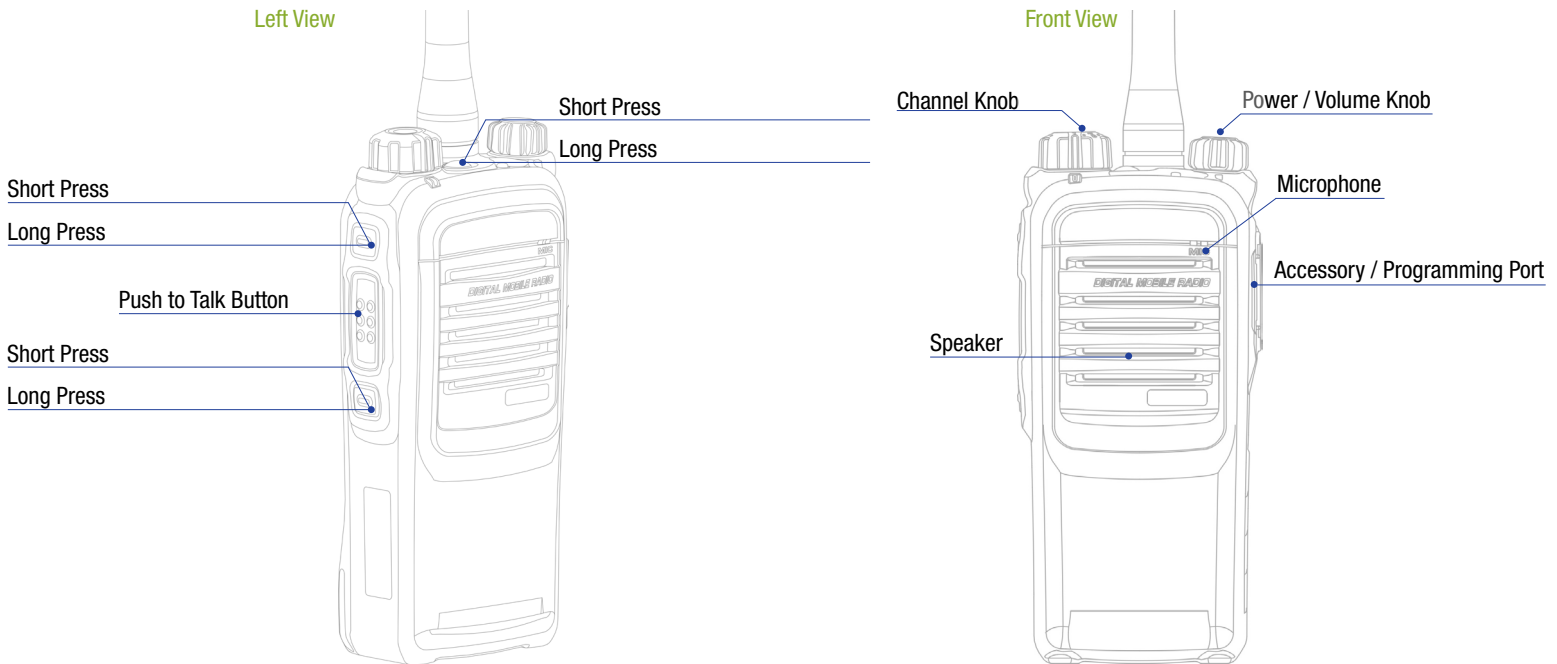

Radio Operation

Charging the Radio

- Please ensure the radio is off when charging
- Charging while the radio is on shortens the lifespan of your battery
- Full charge may take up to 3 hours
- The radio should be placed in the charger with the battery (front of radio) facing the front of the charger.

Transmitting Voice Calls

- To initiate a transmission hold the Push to Talk (PTT) Button
- Once you press the PTT Button, the radio will emit a talk permit chirp
- This talk permit chirp signals that you can begin to speak
- When done speaking release the PTT Button
- For a set period of time the system resources are held to allow immediate responses
- If there is no response within this period the system will be released signaled by a call ended chirp

Turning the Radio On

- Rotate the on / off volume knob to power on & set the volume
- If the radio is tuned to a non-programmed channel it will emit a continuous error tone
- Please reference the zone / channel list to select the appropriate channel

Receiving Voice Calls

- Portables automatically receive transmissions on the Talkgroup

Channel Controls

- There are zones
- Each zone has channels programmed
- To switch zones
- To switch channels Turn the Channel Knob

Custom Programming

Zone

Channel	Name	Channel	Name

Zone

Channel	Name	Channel	Name

Zone

Channel	Name	Channel	Name

Zone

Channel	Name	Channel	Name

Zone

Channel	Name	Channel	Name

Zone

Channel	Name	Channel	Name

Zone

Channel	Name	Channel	Name

Zone

Channel	Name	Channel	Name

For additional support please contact your local dealer.

Your Local Dealer

